




H40-022-91-120-V2


Harden-Graded IP67 / IK10
90W bt PoE Switch



Features

- Flexible SFP transceiver port for uplink
- IP67 standard
- IK10 impact rated cast aluminum housing
- Operating temperature between -40°C and 65°C
- 90W bt PoE port x2
- Supporting 10/100/1000Mbps data rates
- 6KV PoE surge protection
- IEEE 802.3az Energy Efficient Ethernet standard for green power

Applications

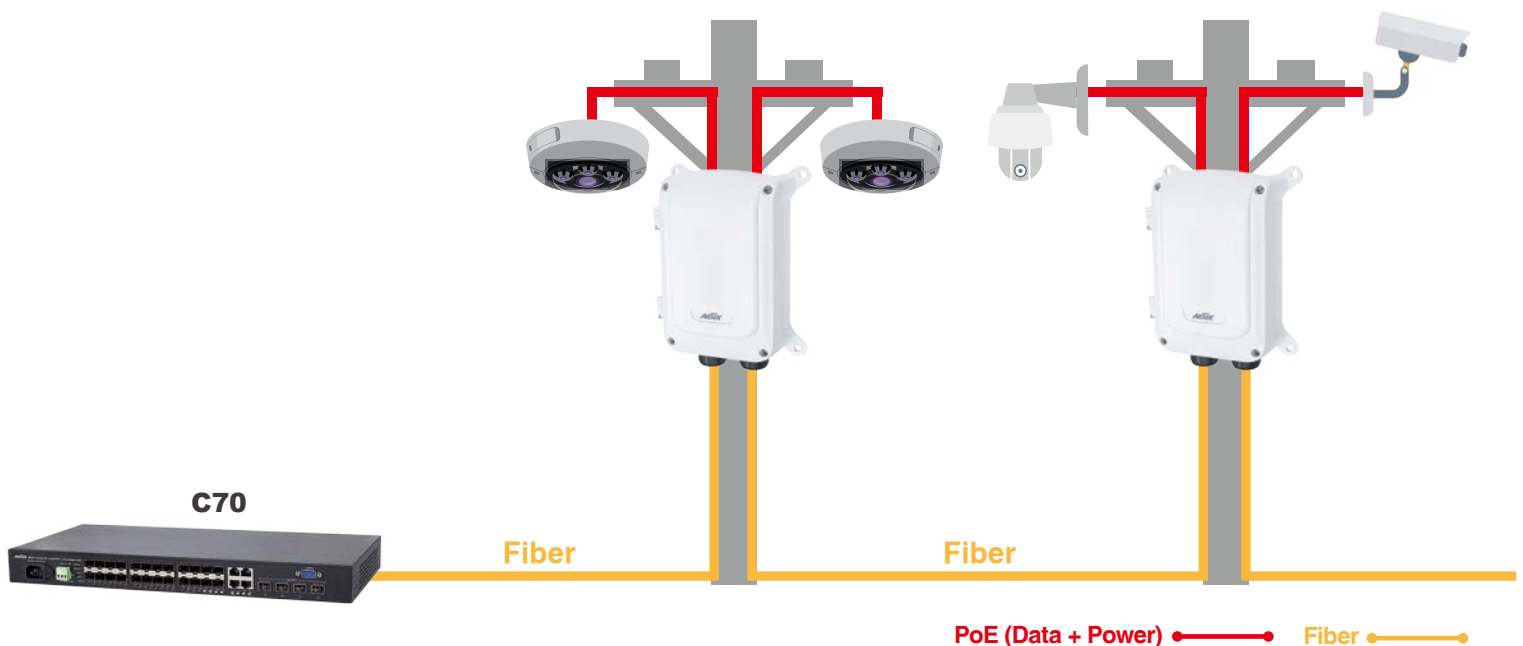




Specifications

H40-022-91-120-V2	
Networking Specifications	
Total Gigabit Ports	4
Gigabit PoE Port (10M/100M/1G)	2x90W bt PoE
30W IEEE802.3 at Power over Ethernet	support
90W IEEE802.3 bt Power over Ethernet	support
Gigabit SFP Slots	2
Forwarding Capacity	11.904Mpps
Mac Table	8k
Jumbo Frames	9,216 Bytes
Switching Capacity	8 Gbps
Power Specifications	
Input Voltage	100VAC ~ 240VAC 280VAC 4hr 300VAC 1min.
Backup Power Input Voltage	48~56VDC
Output Voltage Range / port 1~port 2	54 VDC PoE IEEE 802.3af (Max. 15.4W) output PoE+ IEEE802.3at (Max. 30W) output bt PoE (Max.60W/90W) output
Power Budget	120W
Surge Protection /each PoE Port	6KV
Surge Protection for AC power	10KV
Mechanical Specifications	
Dimensions (L x W x H)	255.2 x 199.9 x 90 mm
Weight	3.2 kg (7.05 lb)
Connectors	PF 3/4" conduit cable gland x1pc M25 cable gland with 5x 5mm holes x1pc
Environmental Specifications	
Weather Rating	IP67
Vandal Proof	IK10
Operating Temperature	-40°C ~ 65°C (-40°F ~ 149°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Operating Humidity	5% ~ 95% non-condensing
Certifications	
EMC	CE, FCC, VCCI, C-Tick Class A
Safety	EN60950-1, IEC60950-1
Surge	EN61000-4-5

Optional Accessories

SFP Modules				
 <p>SFP-ISX-X5 Industrial Gigabit SFP Transceiver</p> <ul style="list-style-type: none"> • MMF • 0.5 km • -40°C ~85°C 	 <p>SFP-ISX-02 Industrial Gigabit SFP Transceiver</p> <ul style="list-style-type: none"> • MMF • 2 km • -40°C ~85°C 	 <p>SFP-ILX-10 Industrial Gigabit SFP Transceiver</p> <ul style="list-style-type: none"> • SMF • 10 km • -40°C ~85°C 	 <p>SFP-ILX-40 Industrial Gigabit SFP Transceiver</p> <ul style="list-style-type: none"> • SMF • 40 km • -40°C ~85°C 	 <p>SFP-ITX-X1 Industrial Gigabit SFP Transceiver</p> <ul style="list-style-type: none"> • SFP • 100 km • -40°C ~85°C

Pole Mount Brackets	Corner Mount Bracket
 <p>AT-100 Pole Mount Adapter</p>	 <p>AT-101 Pole Mount Adapter</p>
	 <p>AT-200 Corner Mount Adapter</p>